

**DIMENSIONE - DIMENSION**


MAX. CONDITIONS



**32°C**



**60 UR%**

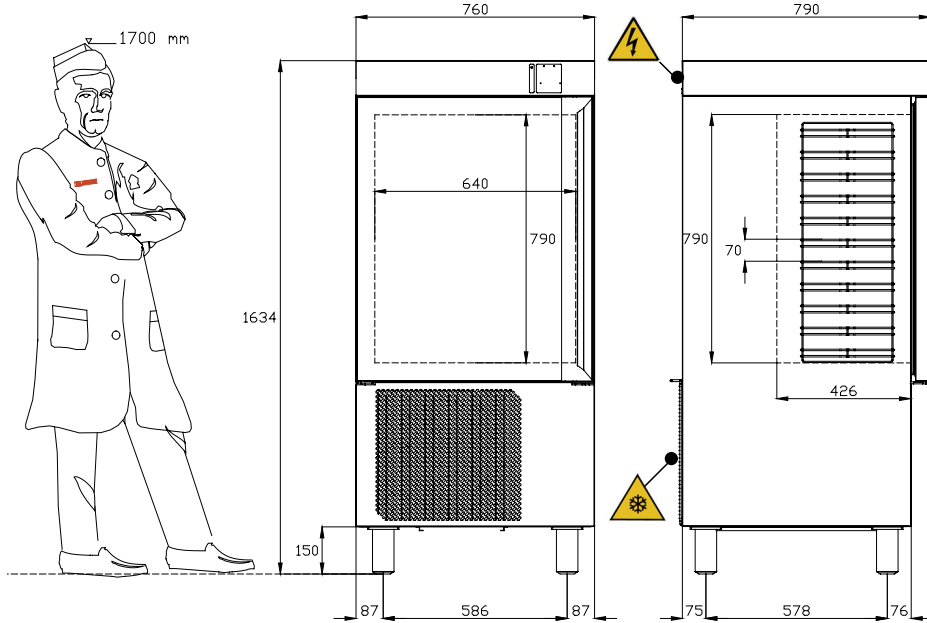

**Basic**



USCITA CAVO DI ALIMENTAZIONE  
ELECTRICAL CONNECTION



CONNESSIONI CIRCUITO REFRIGERANTE  
REFRIGERATION CONNECTION CIRCUIT

RANGE



**+3°C / -18 °C**

COMPANY  
WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2000 =

**AFINOX**

QUALITY PERFORMANCE IN REFRIGERATION

**AMX - 10T**

**Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnico**

Votaggio / Voltage / Spannung / Voltage		400V/3N/50HZ	
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9AMX10B...
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	<b>760</b>
Altezza Height	Höhe Hauteur	mm	<b>1634</b>
Profondità Depth	Tiefe Profondeur	mm	<b>790</b>
Capacità Capacity	Inhalt Capacité	GN 1/1 EN 600 x 400	<b>10</b>
Compressore Compressor	Kompressor Compresseur	DORIN	<b>H200 CS</b>
Resa abbattimento Output chilling	Ergiebigkeit SchnellkühlUNG Rendement refroidissement	kg (t = 90') +70°C/+3°C	<b>40</b>
Resa surgelazione Output freezing	Ergiebigkeit Sockfrostung Rendement congelation	kg (t = 270') +70°C/-18°C	<b>25</b>
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C,+45°C) Puissance frigorifique	kcal/h W	<b>4667</b> <b>5426</b>
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	<b>R 404A</b> <b>2,5</b>
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique		<b>BASIC</b>
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	<b>2500</b>
Rumorosità Noise	Lautstärke Bruit	db	<b>65</b>
Peso Weight	Gewicht Poids	Kg	<b>170</b>