

DIMENSIONE - DIMENSION


MAX. CONDITIONS



32°C



60 UR%

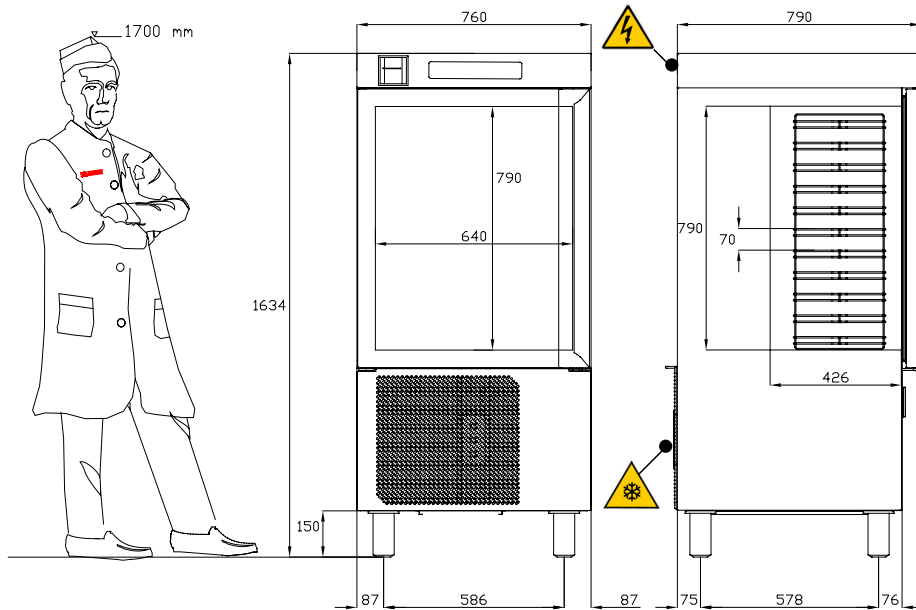

USCITA CAVO DI ALIMENTAZIONE
ELECTRICAL CONNECTION



CONNESSIONI CIRCUITO REFRIGERANTE
REFRIGERATION CONNECTION CIRCUIT

RANGE
+3°C / -18 °C

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
=ISO 9001:2000=

AFINOX QUALITY PERFORMANCE IN REFRIGERATION

AMX - 10T

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

Voltaggio / Voltage / Spannung / Voltage			400V/3N/50HZ
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9AMX10C...
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	760
Altezza Height	Höhe Hauteur	mm	1634
Profondità Depth	Tiefe Profondeur	mm	790
Capacità Capacity	Inhalt Capacité	GN 1/1 EN 600 x 400	10
Compressore Compressor	Kompressor Compresseur	DORIN	H200 CS
Resa abbattimento Output chilling	Ergiebigkeit SchnellkühlUNG Rendement refroidissement	kg (t = 90') +70°C/+3°C	40
Resa surgelazione Output freezing	Ergiebigkeit Sockfrostung Rendement congelation	kg (t = 270') +70°C/-18°C	25
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C,+45°C) Puissance frigorifique	kcal/h W	4667 5426
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 2,5
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique		CHEF
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	2500
Rumorosità Noise	Lautstärke Bruit	db	65
Peso Weight	Gewicht Poids	Kg	170