

DIMENSIONE - DIMENSION


MAX. CONDITIONS



32°C



60 UR%

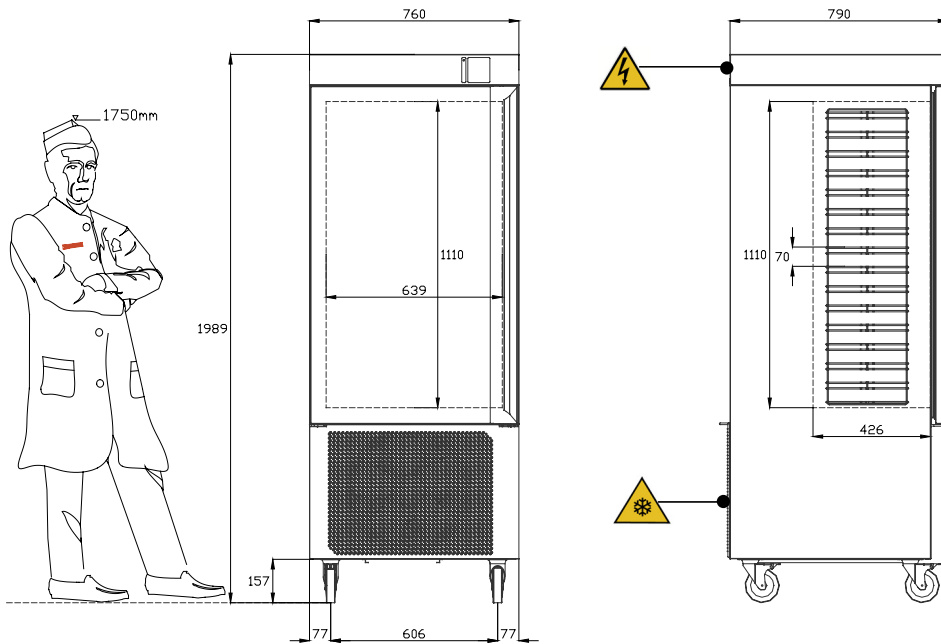

Basic



USCITA CAVO DI ALIMENTAZIONE
ELECTRICAL CONNECTION



CONNESSIONI CIRCUITO REFRIGERANTE
REFRIGERATION CONNECTION CIRCUIT

RANGE



+3°C / -18 °C

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001 : 2000 =

AFINOX

QUALITY PERFORMANCE IN REFRIGERATION

AMX - 15T

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

Voltaggio / Voltage / Spannung / Voltage		400V/3N/50HZ	
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9AMX15B....
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	760
Altezza Height	Höhe Hauteur	mm	1988
Profondità Depth	Tiefe Profondeur	mm	790
Capacità Capacity	Inhalt Capacité	GN 1/1 EN 600x400	15
Compressore Compressor	Kompressor Compresseur	DORIN	H300 CS
Resa abbattimento Output chilling	Ergiebigkeit SchnellkühlUNG Rendement refroidissement	kg (t = 90') +70°C/+3°C	65
Resa surgelazione Output freezing	Ergiebigkeit Sockfrostung Rendement congelation	kg (t = 270') +70°C/-18°C	50
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C,+45°C) Puissance frigorifique	kcal/h W	6907 8031
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 3
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique		BASIC
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	3800
Rumorosità Noise	Lautstärke Bruit	db	70
Peso Weight	Gewicht Poids	Kg	210