



DIMENSIONE - DIMENSION

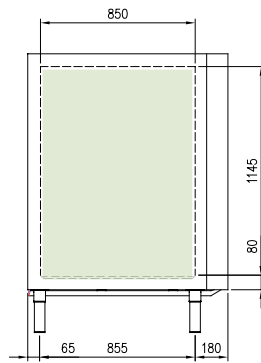

connessioni circuito
refrigerante (versione remota)
refrigeration connection
circuit (remote version)

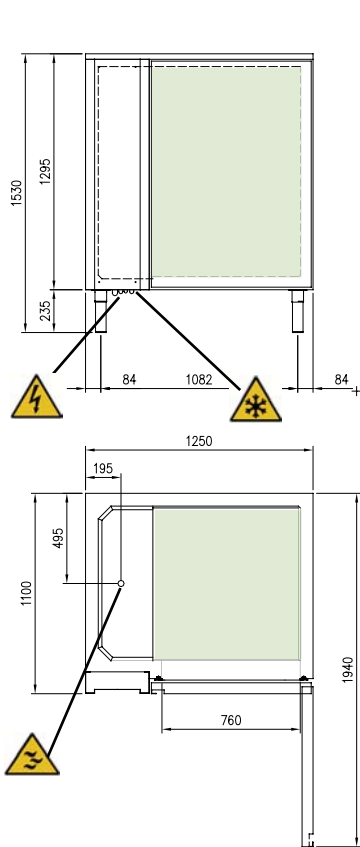

uscita cavo di alimentazione
(5 x 4 mm²)
electrical connection
(5 x 4 mm²)



scarico acqua
water outlet

MAX CONDITIONS



32°C



60 UR%



RANGE



+3°C / -18 °C

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2000 =

AFINOX

QUALITY PERFORMANCE IN REFRIGERATION

AMX 24 T

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

Voltaggio / Voltage / Spannung / Voltage			400V/3N/50HZ	400V/3N/50HZ	400V/3N/50HZ
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	77003600	77003602	77003604
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	1250	1250	1250
Altezza Height	Höhe Hauteur	mm	1530	1530	1530
Profondità Depth	Tiefe Profondeur	mm	1100	1100	1100
Capacità Capacity	Inhalt Capacité	EN600X800 GN 2/1	12	12	12
Resa abbattimento Output chilling	Ergiebigkeit SchnellkühlUNG Rendement congelation	kg (t = 90') +70°C/+3°C	80	110	80
Resa surgelazione Output freezing	Ergiebigkeit Schockfrostung Rendement congelation	kg (t = 270') +70°C/-18°C	65	95	65
Potenza frigorifera Refrigeration power	Kalorienleistung (-20°C,+40°C) Puissance frigorifique	HP W	3 6630	4 8310	-
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène		R 404A	R 404A	R 404A
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	3600W/8A max	4200W/13A max	-
Peso Weight	Gewicht Poids	Kg	370 + 165	370 + 165	370