

**DIMENSIONE - DIMENSION**



**MAX. CONDITIONS**



**38°C**



**60 UR%**

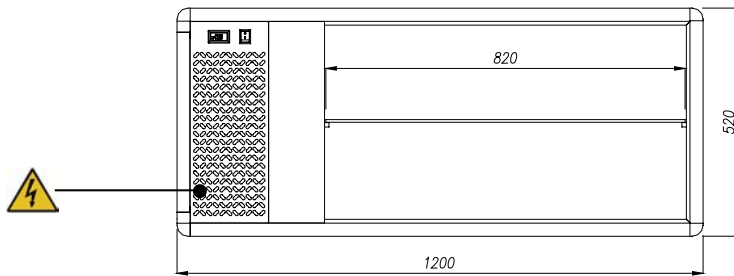

USCITA CAVO DI ALIMENTAZIONE  
ELECTRICAL CONNECTION

**RANGE**  
**+3°C / +10 °C**

COMPANY  
WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2000 =

**AFINOX**

QUALITY PERFORMANCE IN REFRIGERATION

**HELIOS**

**Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos**

230 V / 50 Hz			
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	77000905
Range		°C	+3 °C / +10 °C
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	1200
Altezza Height	Höhe Hauteur	mm	520
Profondità Depth	Tiefe Profondeur	mm	475
Capacità Capacity	Inhalt Capacité	dm <sup>3</sup>	170
Compressore Compressor	Kompressor Compresseur	ASPERA	NB6152GK
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C) Puissance frigorifique	kcal/h W	357 415
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 0,43
Capillare Capillary	Kapillarrohr Capillaire	diam. mm	0,91 2300
Ventilatore del cond. Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	14/15
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique	CAREL ELIWELL	PJ32 S ID 961 H/C
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	460
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h		2,4
Rumorosità Noise	Lautstärke Bruit	db	50
Peso Weight	Gewicht Poids	Kg	65 (75)