










TEMPERATURE RANGE


- TN**  **-2°C / +8°C (PC-PV)**
- BT**  **-24°C / -18°C (PC)**
- BT**  **-20°C / -10°C (PV)**

MAX CONDITION

- TN**  **38°C**  **60 UR%**
- BT**  **38°C**  **60 UR%**
- BT**  **38°C**  **60 UR%**

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2000 =


700+700 L - TAMPONE




Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

230 V / 50 Hz		RANGE	TN + TN	TN +BT	TN+TN (PV)	TN+BT (PV)
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	8T0142INC.....	8T142IBC.....	8T142INV.....	8T142IBV.....
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	1466	1466	1466	1466
Altezza Height	Höhe Hauteur	mm	2090	2090	2090	2090
Profondità Depth	Tiefe Profondeur	mm	800	800	800	800
Capacità Capacity	Inhalt Capacité	dm ³	1200	1200	1200	1200
Compressore Compressor	Kompressor Compresseur	ASPERA	NB 6165 GK NB 6165 GK	NB 6165 GK T2180GK	NB 6165 GK NB 6165GK	NB 6165 GK T2180GK
Potenza frigorifera Refrigeration power	Kalorienleistung (Te:-10°C..-30°C/Tc :+45°C) Puissance frigorifique	kcal/h W	389 / 389 453 / 453	389 / 551 453 / 640	389 / 389 453 / 453	389 / 551 453 / 640
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A / R 404A 0.32 / 0.32	R404A / R 404A 0.32 / 0.35	R 404A / R 404A 0.32 / 0.32	R404A / R 404A 0.32 / 0.35
Capillare / V.T. Capillary / V.T.	Kapillarrohr / V.T. Capillaire / V.T.	diam. mm V.T.	1.24 X 3300 1.24 X 3300	1.24 X 3300 TLK 1.0	1.24 X 3300 1.24 X 3300	1.24 X 3300 TLK 1.0
Ventilatore del cond. Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	10 + 10	10 + 16	10 + 10	10 + 16
Ventilatore dell' evap. Evaporator fan	Verdampferlüfter Ventilateur de l'évaporateur	W	10 + 10	10 + 10	10 + 10	10 + 10
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique	CAREL	IR33 IR33	IR33 IR33	IR33 IR33	IR33 IR33
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W / I max (A)	525+525/3.4+3.4	525+820/3.4+6.4	525+525/3.4+3.4	525+924/3.4+6.7
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h	kWh/24h	13	19.2	15.6	23
Resist. Sbrinamento Defrosting heater	Abtauheizung Resistance degivrage	W	400 + 400	400 + 400	400 + 400	400 + 400
Illuminazione Lighting	Beleuchtung Eclairage	W	15 + 15	15 + 15	36 + 36	36 + 36
Peso Weight	Gewicht Poids	Kg	230	235	240	245


DIMENSIONI-DIMENSIONS

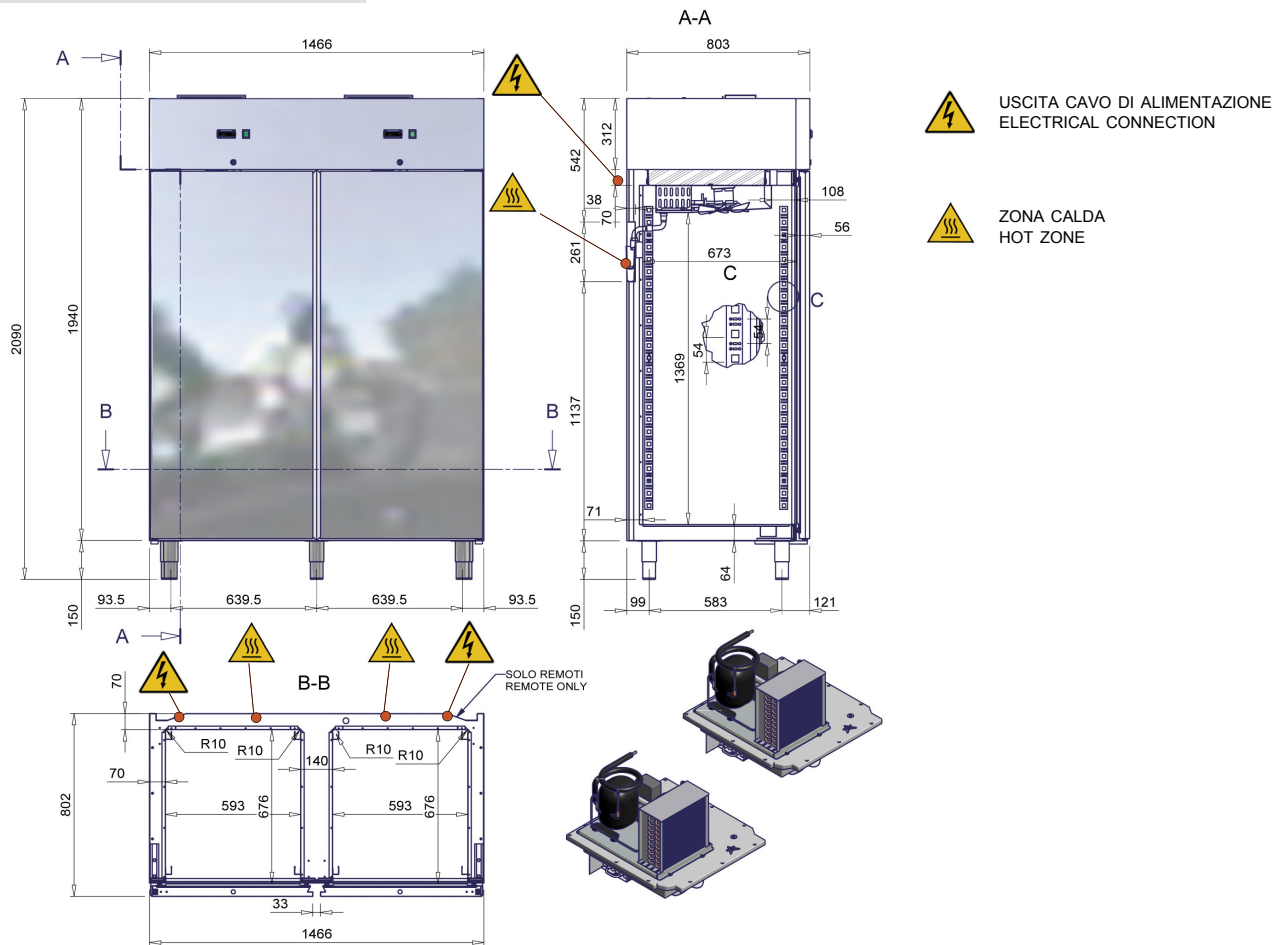

ACCESSORIAMENTO-ACCESSORIES

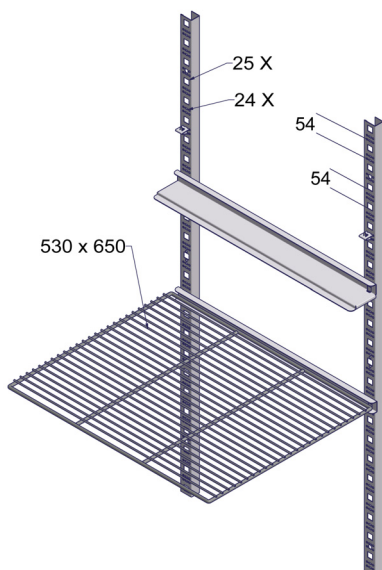

RANGE T°

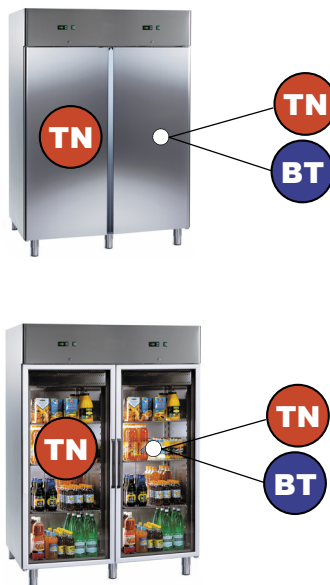

**MINIMA AREA INSTALLAZIONE
MINIMUM INSTALLATION AREA**

