




25°C



60 UR%

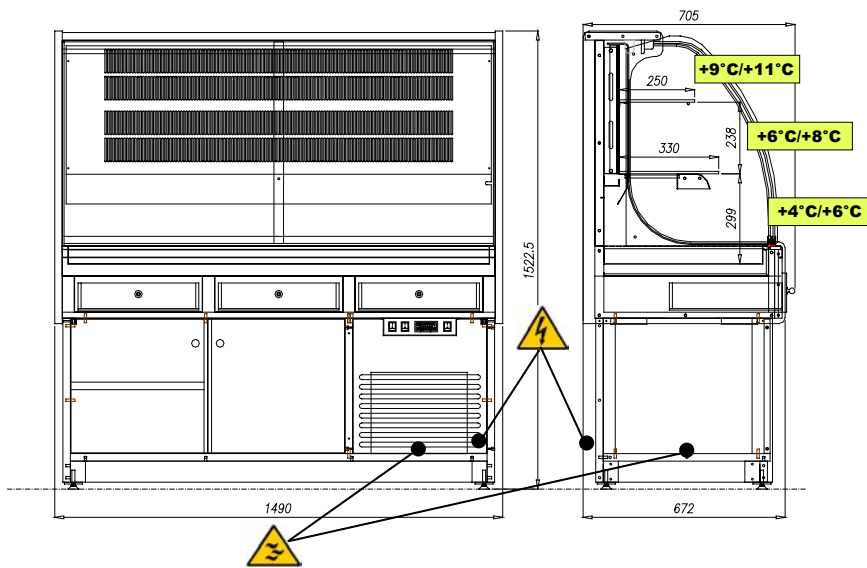

uscita cavo di alimentazione / electrical connection scarico acqua / water outlet

RANGE  
 +4°C / +12°C

COMPANY WITH QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO 9001:2000 =

**AFINOX**

QUALITY PERFORMANCE IN REFRIGERATION

**MURANO**

| Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos |  |                           |                    |                    |  |
|--|--|---------------------------|--------------------|--------------------|--|
| 230 V / 50 Hz  |  |                           |                    |                    |  |
| Codice prodotto / Item code no   | Produkt-Kode-Nr. / Nr. de code du produit            | inox*rostfr.St / s/s*inox | 77006174           | 77006176           |  |
| Range  |  | °C                        | +4 °C / +12 °C     | +4 °C / +12 °C     |  |
| Lunghezza esterna / Outside length   | Aussenlänge / Longueur extérieure                    | mm                        | 1490               | 1490               |  |
| Altezza / Height   | Höhe / Hauteur                                       | mm                        | 1522               | 1522               |  |
| Profondità / Depth   | Tiefe / Profondeur                                   | mm                        | 672                | 672                |  |
| Compressore / Compressor   | Kompressor / Compresseur                             | ASPERA                    | NB6152GK           | NB6152GK           |  |
| Potenza frigorifera / Refrigeration power  | Kalorienleistung (-10°C) / Puissance frigorifique    | kcal/h / W                | 357 / 415          | 357 / 415          |  |
| Fluido refrigerante / Refrigerant fluid  | Kältemittel / Gas frigorigène                        | kg                        | R 404A / 0,56      | R 404A / 0,56      |  |
| Capillare / Capillary  | Kapillarrohr / Capillaire                            | diam. / mm                | 0,91 / 3000        | 0,91 / 3000        |  |
| Ventilatore del cond. / Condenser fan  | Kondensatorlüfter / Ventilateur du condensateur      | W                         | 10/38              | 10/38              |  |
| Ventilatore dell' evap. / Evaporator fan   | Verdampferlüfter / Ventilateur de l'évaporateur      | W                         | -                  | -                  |  |
| Centralina elettronica / Electronic central unit   | Elektronisches Steuergehäuse / Centrale électronique | CAREL / ELIWELL           | PJ32S / ID 961 H/C | PJ32S / ID 961 H/C |  |
| Potenza assorbita / Absorbed power   | Leistungsaufnahme / Puissance absorbée               | W                         | 640                | 640                |  |
| Consumo giornaliero/24h / Daily consumption/24h  | Tagesverbrauch/24h / Consommation par jour/24h       |                           | 9,3                | 9,3                |  |
| Rumorosità / Noise   | Lautstärke / Bruit                                   | db                        | 50                 | 50                 |  |
| Peso / Weight  | Gewicht / Poids                                      | Kg                        | 211(243)           | 211 (243)          |  |