





32°C



60 UR%

# TRX 904 TN-BT

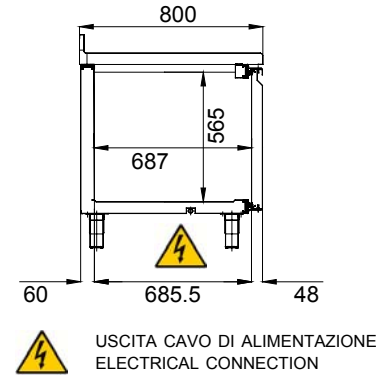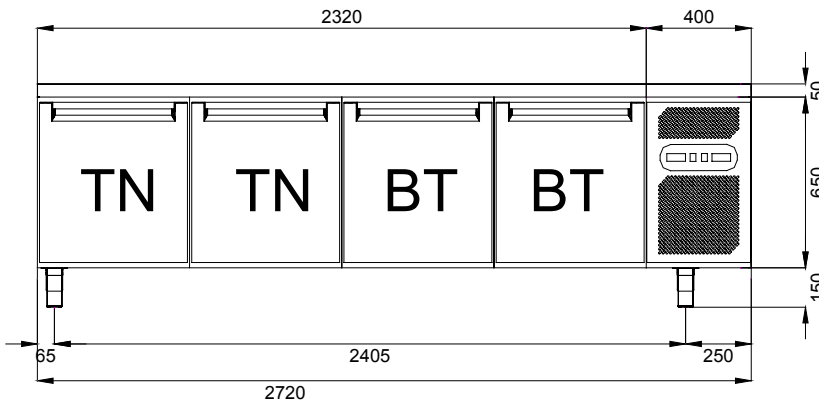

(\*) vano TN inizia raffreddamento se vano BT ha temperatura minore di -10°C

COMPANY  
WITH QUALITY MANAGEMENT  
SYSTEM CERTIFIED BY DNV  
= ISO 9001:2000 =

# AFINOX

QUALITY PERFORMANCE IN REFRIGERATION

RANGE TN

RANGE BT



0°C / +7°C

-20°C / -10°C

# TRX904 TN-BT

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

230 V / 50 Hz				
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9TRX94IDAN901	
Range		°C	0°C / +7°C (*)	-20°C / -10°C
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	2720	
Altezza Height	Höhe Hauteur	mm	850	
Profondità Depth	Tiefe Profondeur	mm	800	
Capacità Capacity	Inhalt Capacité	dm <sup>3</sup>	760	
Compressore Compressor	Kompressor Compresseur	ASPERA	T2178GK CSR	
Potenza frigorifera Refrigeration power	Kalorienleistung (-30/+45°C) Puissance frigorifique	kcal/h W	584 679	
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 0,38	
Capillare Capillary	Kapillarrohr Capillaire	diam. mm	1,24/0,049" 2500	
Ventilatore del cond. Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	18	
Ventilatore dell' evap. Evaporator fan	Verdampferlüfter Ventilateur de l'évaporateur	W	2 X14	14
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique	ELIWELL CAREL	ID 974 LX PJ32S	
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h	kWh/24h (W)	14.5 (830)	
Rumorosità Noise	Lautstärke Bruit	db	54	
Peso Weight	Gewicht Poids	Kg	210	