
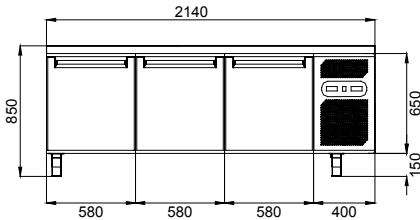



DIMENSIONE - DIMENSION

TRX 902

TRX 903

TRX 904

 USCITA CAVO DI ALIMENTAZIONE
 ELECTRICAL CONNECTION

MAX CONDITIONS

38°C

60 UR%

RANGE

-2°C / +7°C
TRX 900 TN

 COMPANY
 WITH QUALITY MANAGEMENT
 SYSTEM CERTIFIED BY DNV
 ISO 9001:2000

AFINOX

QUALITY PERFORMANCE IN REFRIGERATION

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

| 230 V / 50 Hz | | | | | | |
|---|--|----------------------------|---------------------|---------------------|---------------------|--|
| Codice prodotto Item code no | Produkt-Kode-Nr. Nr. de code du produit | inox*rostfr.St s/s*inox | 9TRX92IP.N... | 9TRX93IP.N... | 9TRX94IP.N... | |
| Range | | °C | -2°C / +7°C | -2°C / +7°C | -2°C / +7°C | |
| Lunghezza esterna Outside length | Aussenlänge Longueur extérieure | mm | 1560 | 2140 | 2140 | |
| Altezza Height | Höhe Hauteur | mm | 850 | 850 | 850 | |
| Profondità Depth | Tiefe Profondeur | mm | 800 | 800 | 800 | |
| Capacità Capacity | Inhalt Capacité | dm ³ | 380 | 570 | 760 | |
| Compressore Compressor | Kompressor Compresseur | ASPERA | NB6165GK | NB6165GK | NB6165GK | |
| Potenza frigorifera Refrigeration power | Kalorienleistung (-10°C) Puissance frigorifique | kcal/h W | 437 508 | 437 508 | 437 508 | |
| Fluido refrigerante Refrigerant fluid | Kältemittel Gas frigorigène | kg | R 404A 0,38 | R 404A 0,38 | R 404A 0,38 | |
| Capillare Capillary | Kapillarrohr Capillaire | diam. mm | 1,06/0,042" 2500 | 1,06/0,042" 2500 | 1,06/0,042" 2500 | |
| Ventilatore del cond. Condenser fan | Kondensatorlüfter Ventilateur du condensateur | W | 10 | 10 | 10 | |
| Ventilatore dell' evap. Evaporator fan | Verdampferlüfter Ventilateur de l'évaporateur | W | 14 | 14 | 2 x 14 | |
| Centralina elettronica Electronic central unit | Elektronisches Steuergehäuse Centrale électronique | ELIWELL CAREL | ID 961 H/C PJ32S | ID 961 H/C PJ32S | ID 961 H/C PJ32S | |
| Consumo giornaliero/24h Daily consumption/24h | Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h | kWh/24h (W) | 6.2 (550) | 6.4 (550) | 7.87 (550) | |
| Rumorosità Noise | Lautstärke Bruit | db | 52 | 52 | 52 | |
| Peso Weight | Gewicht Poids | Kg | 130 (150) | 165 (190) | 205 (225) | |